
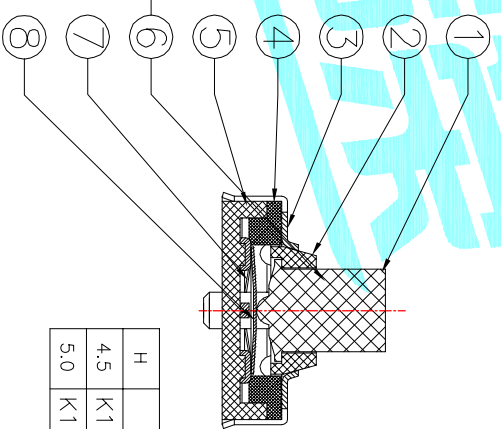
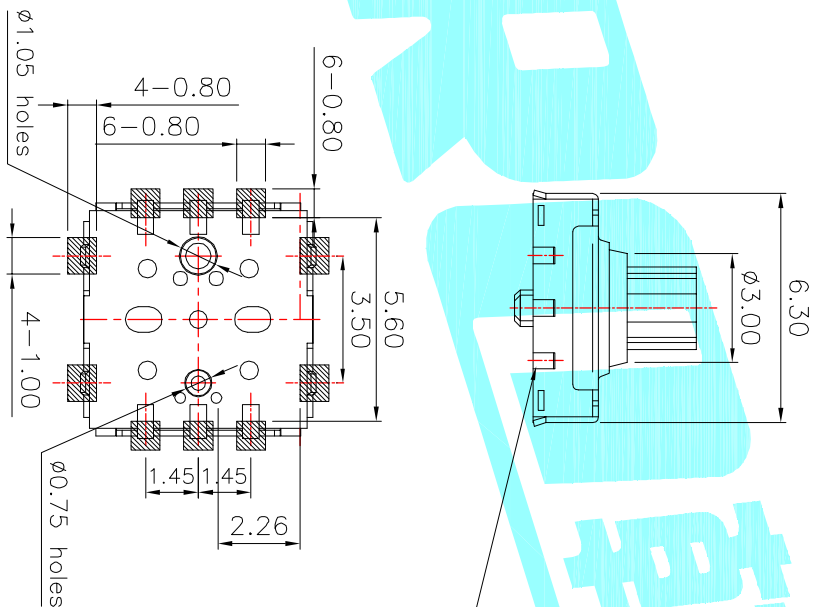
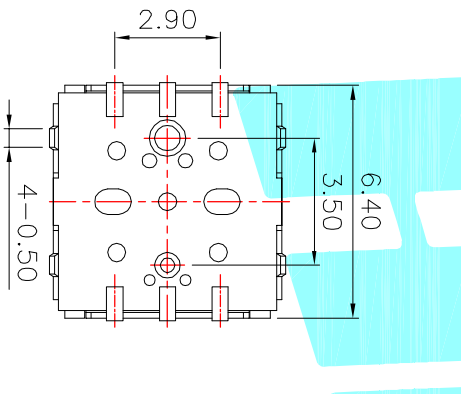


NOTE:
 Operating Force: 160 ± 35 gf
 lever portion 250 ± 35 gf
 Push portion 250 ± 35 gf

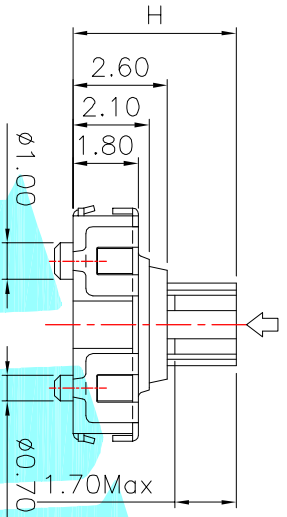

H	PART NO.
4.5	K1-1202UA-01
5.0	K1-1202UA-02

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑧	Contact 2	—	1	F.Ag./SUS/φ3.5	Natural	—
⑦	Contact 1	—	4	F.Ag./SUS/φ2.4	Natural	—
⑥	Terminal	—	6	Brass(O.15t)	Plating silver	—
⑤	Base	—	1	LCP	Black	—
④	Gasket	—	1	LCP	Black	—
③	Cover	—	1	Brass(O.15t)	Plating silver	—
②	Axle sleeve	—	1	LCP	Ivory Tint	—
①	Keystroke	—	1	PA46	Black	—

APPROVALS	DATE
DRAWN J.X.Zhang	2013/7/26

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
—	A	—	NEW	—	—	—

CHECKED	TOLERANCES ARE	ANGLE	UNIT:	SCALE:	PROJ:
APPROVALS	30~12.5 ± ±0.30 10~30 ±0.20 5~10 ±0.15 ~5 ±0.10	±2°	mm	1:1	—

OKHRO
 ELECTRONICS CO.,LTD
 MULTIFUNCTIONAL SWITCHES