

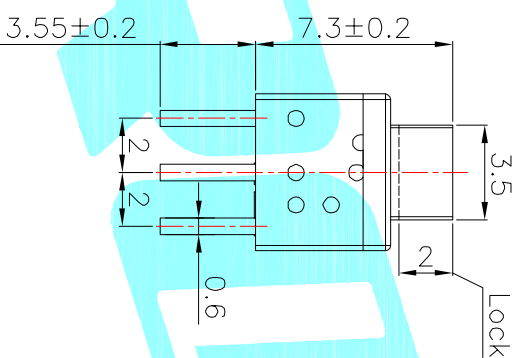





NOTE:  
 1. Operating Force: 180gf±50gf  
 2. Travel : 2.0±0.2mm

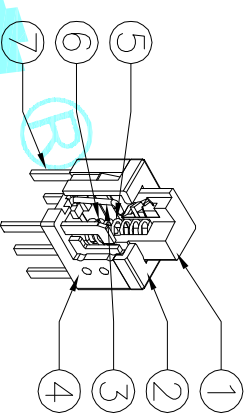

PCB Layout(Pattern Side)



Circuit Diagram

NO.	Operating Type	Part No.
1	Push To Lock	K8-5851E-L1
2	Push No Lock	K8-5851E-N2
3	Push No Sound No Lock	K8-5851E-NN

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑦	Terminal	—	6	Brass strip	Plating silver	—
⑥	Contact	—	2	Phosphor bronze	Plating silver	—
⑤	Spring	—	1	SUS	Natural	—
④	Base	—	1	Nylon	Gray	—
③	Crochet Needle	—	1	SUS	Natural	—
②	Cover	—	1	POM	Black	—
①	KNOB	—	1	POM	White	—

APPROVALS		DATE	TITLE:	
DRAWN	J.X.Zhang	2013/10/16	PUSHBUTTON SWITCHS	
CHECKED			ELECTRONICS CO.,LTD	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE	ANGLE	UNIT:	SCALE:	PROJ:	SHEET
—	A	—	NEW	—	—	—	30~±0.1	±0.30	mm	1:1	OKHRO	1 OF 1
—	—	—	—	—	—	—	10~±0.10	±0.20	—	—	—	—
—	—	—	—	—	—	—	5~±0.10	±0.15	—	—	—	—
—	—	—	—	—	—	—	~5	±0.10	—	—	—	—