



P.C.B LAYOUT(top view)

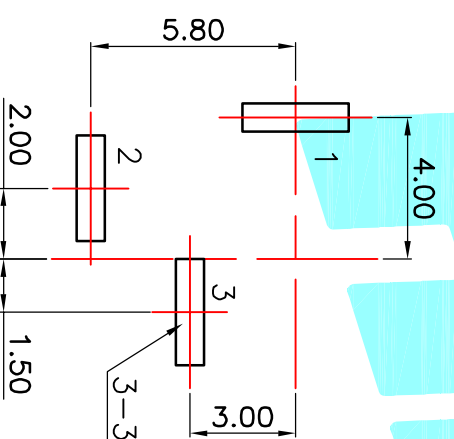

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature: -20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

Model No.	1	2	3
PIN	∅2.0	∅2.35	∅2.5

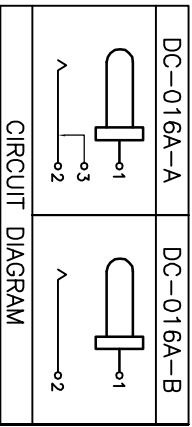

② Terminal	3	Phosphor bronze	Au Plating
① Housing	1	Nylon	Black
ITEM PART NAME	TERN.O.	QTY.	MATERIAL FINISHING
APPROVALS		DATE	REMARK
DRAWN	J.X.Zhang	2013/11/11	
CHECKED			
APPROVALS		TITLE:	PHONE JACKES
TOLERANCES ARE		PART NO.	DC-016A
30 ^{±0.15}	±0.30	SCALE:	1:1
10 ^{±0.20}	±0.20	UNIT:	mm
5 ^{±0.10}	±0.10	DRAWING NO.	
~5	±0.10	±Z'	



ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			