

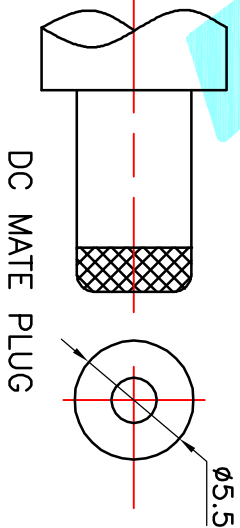


P.C.B LAYOUT(Copper-side view)

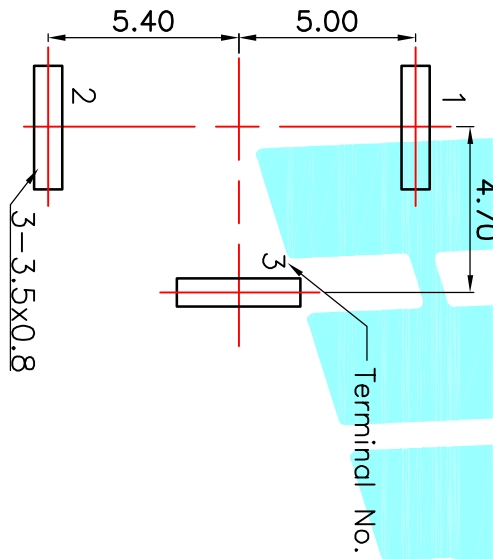

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3~20N
 Operating Life:5,000cycles

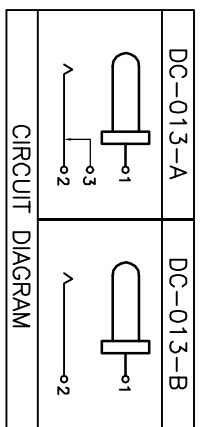

Model No.	1	2	3
PIN	$\phi 2.0$	$\phi 2.35$	$\phi 2.5$

② Terminal	3	Phosphor bronze	Au Plating
① Housing	1	Nylon	Black
ITEM PART NAME	TERN.O.	QTY.	MATERIAL FINISHING
APPROVALS		DATE	REMARK
DRAWN	J.X.Zhang	2013/11/11	
ELECTRONICS CO.,LTD			
PHONE JACKES			
DC-013			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
TOLERANCES ARE						
	30 ^{±0.15}	±0.30	ANGLE	±2'	DRAWING NO.	SHEET 1 OF 1
	10 ^{±0.10}	±0.20	UNIT: mm			
	5 ^{±0.10}	±0.15	SCALE: 1:1			