
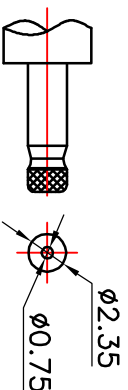


P.C.B LAYOUT(Copper-side view)

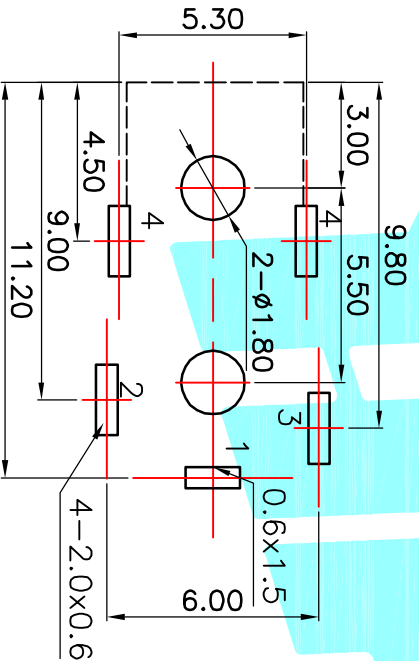

DC MATE PLUG

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature:-20℃~70℃  
 Operating force:3-20N  
 Operating Life:5,000cycles

②	Terminal	5	Phosphor bronze	Au Plating		
①	Housing	1	Nylon	Black		
ITEM	PART NAME	TERN.O.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				
DRAWN	J.X.Zhang	2013/11/11		ELECTRONICS CO.,LTD		
CHECKED				TITLE: PHONE JACKES		
APPROVALS				PART NO. DC-011A		
TOLERANCES ARE		30 <sup>±0.15</sup>	±0.30	ANGLE		
		10 <sup>±0.10</sup>	±0.20	UNIT: mm	SCALE: 1:1	PROJ.
		5 <sup>±0.10</sup>	±0.15	±Z	DRAWING NO.	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			