
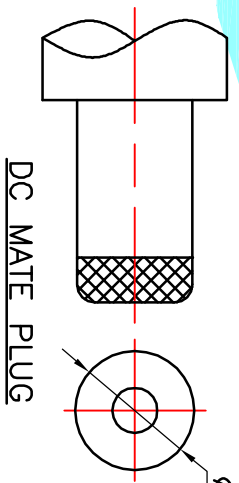


Model No.	1	2
PIN	∅2.0	∅2.5

P.C.B LAYOUT(Copper-side view)

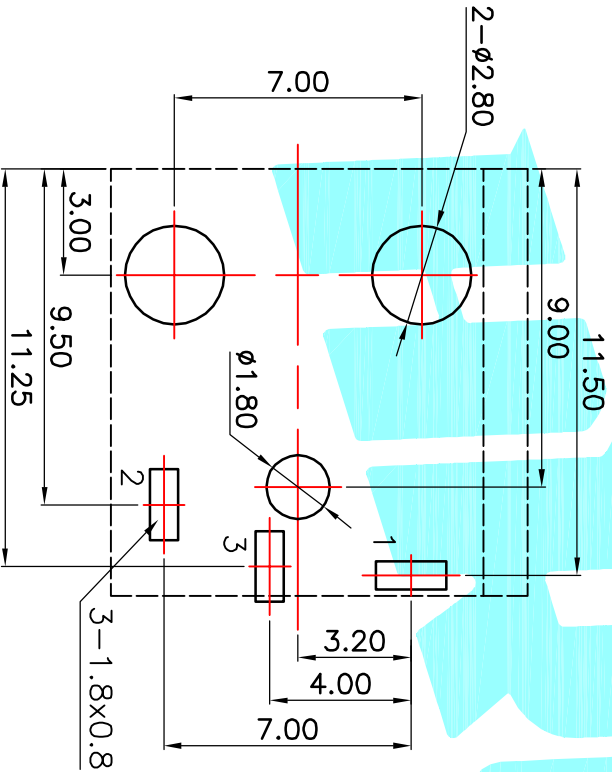

DC MATE PLUG

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature: -20℃~70℃  
 Operating force:3-20N  
 Operating Life:5,000cycles

② Terminal	3	Phosphor bronze	Au Plating
① Housing	1	Nylon	Black
ITEM	PART NAME	TERN.O.	QTY.
APPROVALS		DATE	
DRAWN	J.X.Zhang	2013/11/11	
CHECKED		TITLE:	PHONE JACKETS
APPROVALS		PART NO.	DC-004A
TOLERANCES ARE		SCALE:	1:1
30 <sup>±</sup> 0.15	±0.30	ANGLE	
10 <sup>±</sup> 0.10	±0.20	UNIT:	mm
5 <sup>±</sup> 0.10	±0.15	DRAWING NO.	
~ 5	±Z	SHEET	1 OF 1



ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			