
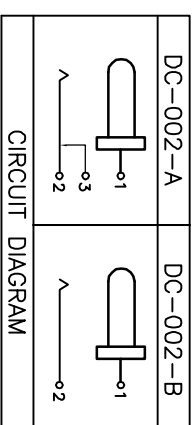


P.C.B LAYOUT(Copper-side view)

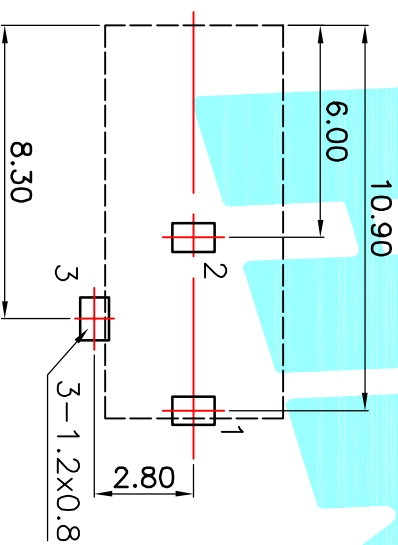

Model No.	1	2	3	4
PIN	$\phi 0.65$	$\phi 1.0$	$\phi 1.3$	$\phi 1.65$
DC PLUG O.D.	$\phi 2.35$	$\phi 3.5$	$\phi 3.5$	$\phi 4.0$

Rating:0.5A 30V DC
 Contact Resistance:100 m Ω Max.
 Operating temperature:-20 $^{\circ}$ C~70 $^{\circ}$ C
 Operating force:3-20N
 Operating Life:5,000cycles

ITEM	Terminal	3	Phosphor bronze	Au Plating
①	Housing	1	Nylon	Black
②	Terminal	3	Phosphor bronze	Au Plating

DRAWN J.X.Zhang 2013/11/11
 TITLE: PHONE JACKES
 DC-002

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS	DATE	REMARK
CHECKED		
APPROVALS		
TOLERANCES ARE	30 μ m以上 10~30 5~10	± 0.30 ± 0.20 ± 0.15
	~5	± 0.10
ANGLE		$\pm 2^{\circ}$
UNIT: mm		
SCALE: 1:1		
DRAWING NO.		
		SHEET 1 OF 1



ELECTRONICS CO.,LTD