
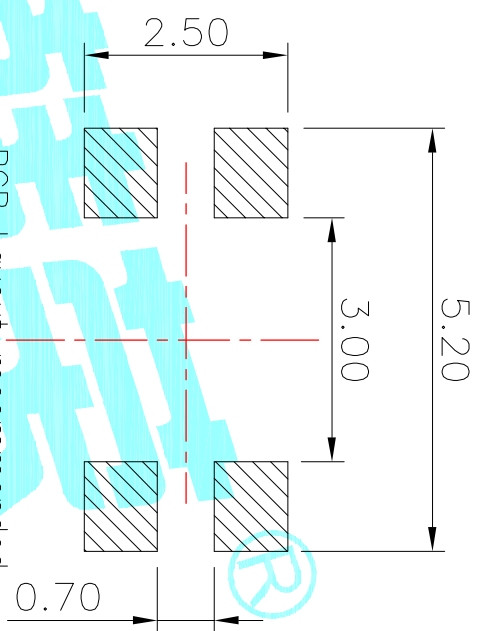
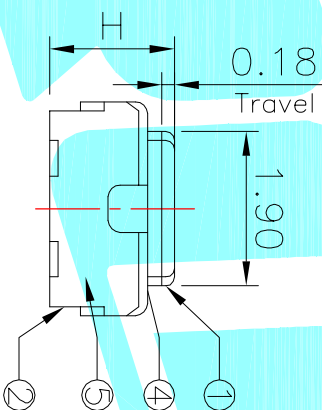


Circuit diagram

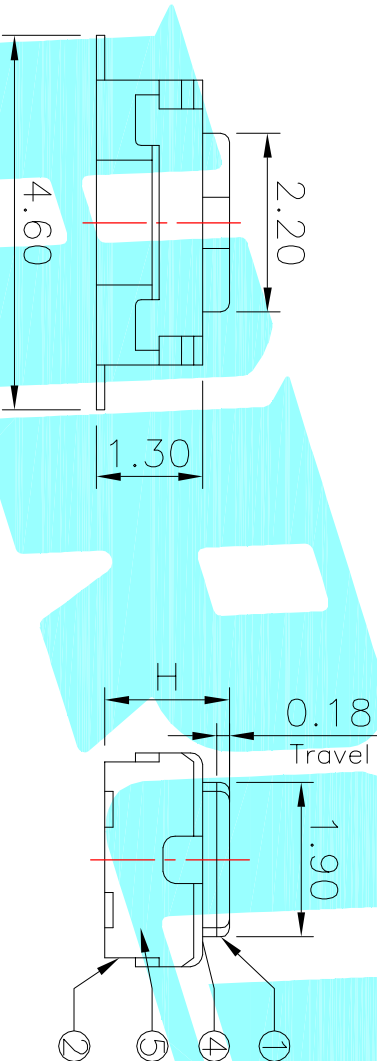

PCB Layout recommended

PART NO	NO.1	H
A	2.0	
H	1.6	

PART NO	NO.3	MATERIAL/qty.
S	SUS/1PC	
D	SUS/2PCS	

PART NO	NO.2	vigor
2	130±30	
3	160±30	
4	250±30	

PART NO	NO.4-NO.5	NOTE
01~99	SERIAL NUMBER	

NOTE:  
 Rating: DC 12V 50mA  
 Lifetime: 100,000 Cycles  
 Packaging: 3000pcs/Reel

⑤	Terminal	—	4	Phosphor Bronze	Ag-PLATED	—
④	Shell	—	1	SUS	Natural	—
③	Contact	—	1	SUS	Ag-PLATED	—
②	Base	—	1	Nylon	Black	—
①	Keystroke	—	1	Nylon	Black	—

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
DRAWN xu qi feng2014/10/17 CHECKED APPROVALS TOLERANCES ARE 30~125 ±0.30 ANGLE PART NO. K2-1809SM-□□□W-□□ 10~30 ±0.20 UNIT: mm SCALE: 1:1 PROJ: 5~10 ±0.15 ±2? DRAWING NO. SHEET 1 OF 1 ~5 ±0.10						



ELECTRONICS CO.,LTD

TACT SWITCHS