



Circuit Diagram

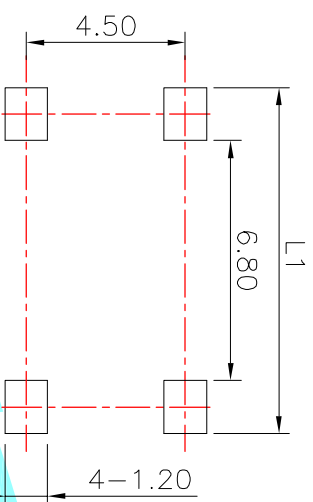

PCB Layout (Pattern side)

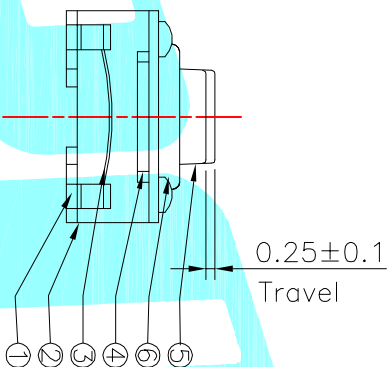

- Typical Specifications
1. Rating : DC 12V 50mA
 2. Contact Resistance: $\leq 100m\Omega$
 3. Insulation Resistance: $\geq 100m\Omega$ DC250V
 4. Operating Temperature Range: $-25^{\circ}C$ to $+80^{\circ}C$
 5. Ambient Humidity Used: $\leq 85\%RH$
 6. Travel: $0.25\pm 0.1mm$
 7. Life : 200,000 Cycles
 8. IP Rating: IP66

NO.4	
PART NO.	NOTE
A	8 10
C	9 11
E	10 12

NO.3	
PART NO	MATERIAL/Qty
S	SUS/1PC
C	C5210/1PC
D	SUS/2PCS
F	C5210/2PCS

NO.5-NO.6	
PART NO	NOTE
01~99	SERIAL NUMBER

ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK
⑥	Cover	—	1	Brass	Tin Plated	—
⑤	Keystroke	—	1	Nylon	Red	—
④	Waterproof Silicone	—	1	Silica gel	Black	—
③	Contact	—	1	F.Ag/SUS	Plating silver	—
②	Base	—	1	Nylon	Black	—
①	Terminal	—	4	Copper(0.3t)	Plating silver	—

APPROVALS		DATE	
DRAWN	J.X.Zhang	DATE	2014/6/13

CHECKED		TITLE:																	
APPROVALS		TACT SWITCHS																	
TOLERANCES ARE	<table border="1"> <tr> <td>30~12.5</td> <td>±0.30</td> <td>ANGLE</td> <td></td> </tr> <tr> <td>10~30</td> <td>±0.20</td> <td>UNIT: mm</td> <td></td> </tr> <tr> <td>5~10</td> <td>±0.15</td> <td>SCALE: 1:1</td> <td></td> </tr> <tr> <td>~5</td> <td>±0.10</td> <td>DRAWING NO.</td> <td></td> </tr> </table>	30~12.5	±0.30	ANGLE		10~30	±0.20	UNIT: mm		5~10	±0.15	SCALE: 1:1		~5	±0.10	DRAWING NO.		PART NO. K2-1110SP-□□□□-□□	PROJ:
30~12.5	±0.30	ANGLE																	
10~30	±0.20	UNIT: mm																	
5~10	±0.15	SCALE: 1:1																	
~5	±0.10	DRAWING NO.																	
		SHEET	1 OF 1																

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			



ELECTRONICS CO.,LTD