


MODEL NO.	PJ-616
SCHMATIC	

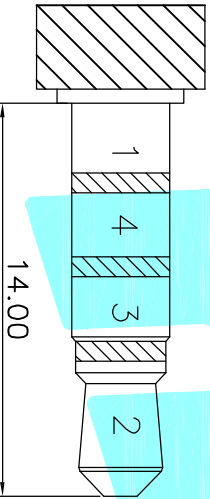

Ø3.5 MATE PLUG

- NOTES:
1. CONTACT CURRENT RATING: 12V 1A.
  2. CONTACT RESISTANCE: 50mΩ MAX.;
  3. INSULATION RESISTANCE: 100M MIN. 500V DC;
  4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
  5. DURABILITY: 5,000 CYCLES MIN.;
  6. CONNECTOR MATING FORCES: 29.4N (3.00kgf) MAX.;
  7. CONNECTOR UNMATING FORCES: 2.94N(0.30kgf) MIN.;

PAD LAYOUT (TOP)

ITEM	PART NAME	Serial number	QTY.	MATERIAL	FINISHING	REMARK
⑤	Housing		1	Nylon	Block	
④	Terminal 4		1	Copper Alloy	Plating Au	
③	Terminal 3		1	Copper Alloy	Plating Au	
②	Terminal 2		1	Copper Alloy	Plating Au	
①	Terminal 1		1	Copper Alloy	Plating Au	

APPROVALS	DATE	ELECTRONICS CO.,LTD	
DRAWN	QIFENG.XU	2014.11.28	

CHECKED	TITLE:	PHONE JACK												
APPROVALS	PART NO.	PJ-616												
TOLERANCES ARE	SCALE: 1:1	PROT. SHEET 1 OF 1												
<table border="1"> <tr> <td>30<sup>±0.15</sup></td> <td>±0.30</td> <td>ANGLE</td> </tr> <tr> <td>10<sup>±0.10</sup></td> <td>±0.20</td> <td>UNIT: mm</td> </tr> <tr> <td>5<sup>±0.10</sup></td> <td>±0.15</td> <td>±Z'</td> </tr> <tr> <td>~ 5</td> <td>±0.10</td> <td>DRAWING NO.</td> </tr> </table>	30 <sup>±0.15</sup>	±0.30	ANGLE	10 <sup>±0.10</sup>	±0.20	UNIT: mm	5 <sup>±0.10</sup>	±0.15	±Z'	~ 5	±0.10	DRAWING NO.		
30 <sup>±0.15</sup>	±0.30	ANGLE												
10 <sup>±0.10</sup>	±0.20	UNIT: mm												
5 <sup>±0.10</sup>	±0.15	±Z'												
~ 5	±0.10	DRAWING NO.												

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			