
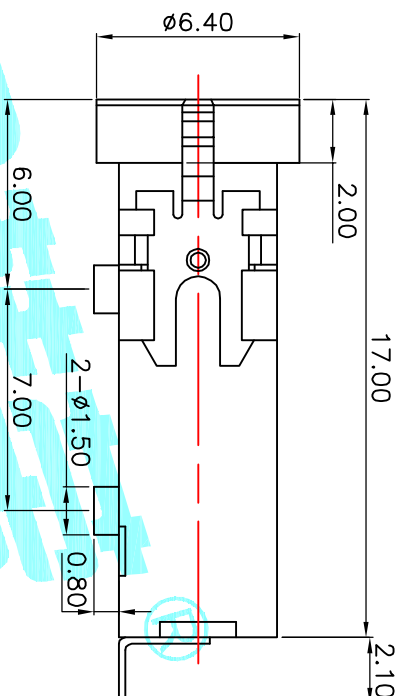


P.C.B Layout (copper-sided view)

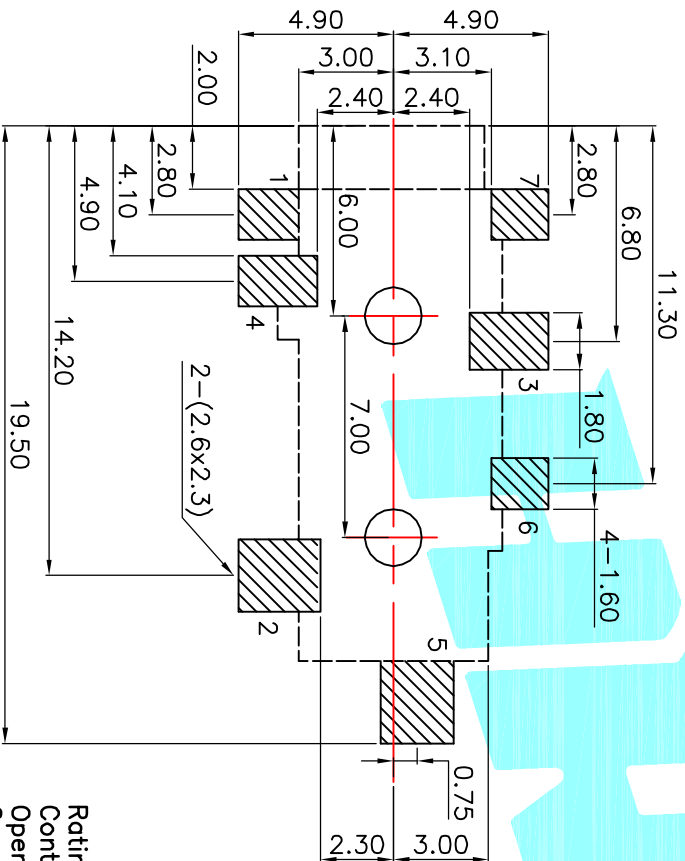

Rating:0.5A 30V DC
 Contact Resistance:100 m Ω Max.
 Operating temperature:-20 $^{\circ}$ C~70 $^{\circ}$ C
 Operating force:3-20N
 Operating Life:5,000cycles

Model NO	PJ-328D-A	PJ-328D-B	PJ-328D-C
Schematic			
Model NO	PJ-328D-D	PJ-328D-E	PJ-328D-F
Schematic			

② Terminal	6	Phosphor bronze	Au Plating
① Housing	1	Nylon	Black
ITEM PART NAME	TER.NO. QTY.	MATERIAL	FINISHING
APPROVALS	DATE	ELECTRONICS CO.,LTD	
DRAWN J.X.Zhang	2013/11/14	TITLE:	PHONE JACKES
CHECKED		PART NO.	PJ-328D
APPROVALS		SCALE:	1:1
TOLERANCES ARE	50- ± 0.15	50-30	50-20
	5-10	50-15	50-10
	~ 5	50-10	50-10
		ANGLE	$\pm 2^{\circ}$
		UNIT:	mm
		DRAWING NO.	
		SHEET	1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.
	A		NEW
CHANGE.	CHECK.	APPRO.	