

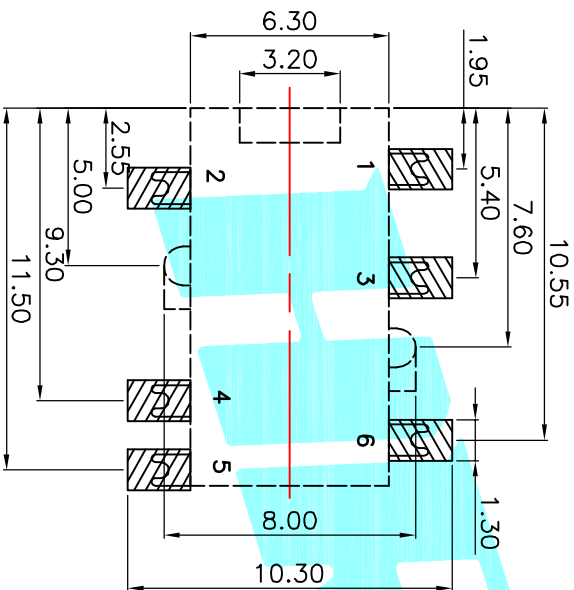
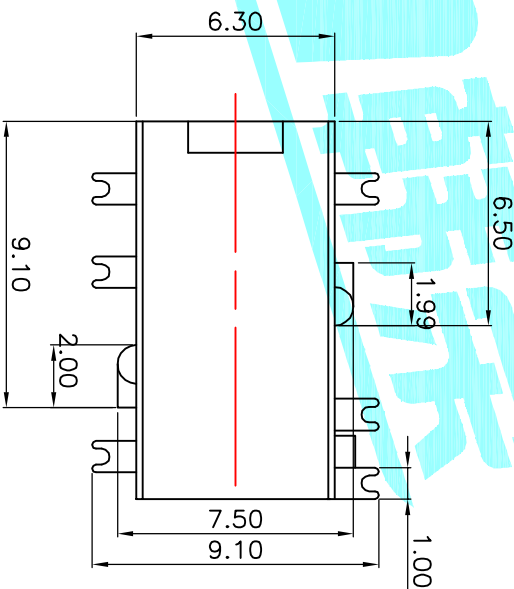


P.C.B Layout (copper-sided view)

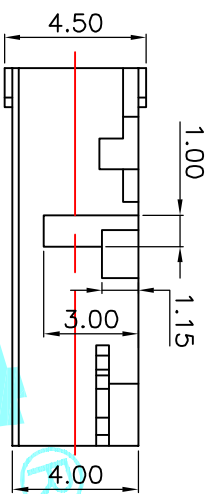

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3~20N
 Operating Life:5,000cycles

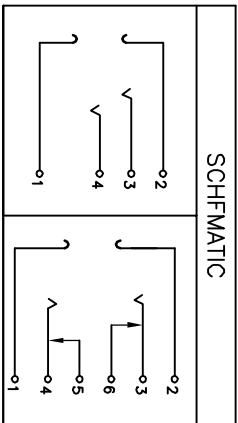

ECN NO.	REV.	DATE.	DESCRIPTION.	DRAWN	CHECK.	APPRO.
	B					
	A					

DRAWN	J.X.Zhang	DATE	2013/11/11
CHECKED			
APPROVALS			
TOLERANCES ARE	30 ^{+0.15} / _{-0.10}	±0.30	ANGLE
	10 ^{+0.20} / _{-0.15}	±0.20	
	5 ^{+0.15} / _{-0.10}	±0.15	±2°
	~ 5	±0.10	

ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK
②	Terminal		5	Phosphor bronze	Au Plating	
①	Housing		1	Nylon	Black	

TITLE:	PHONE JACKES
PART NO.	PJ-399J
SCALE:	1:1
PROJ. NO.	
DRAWING NO.	
SHEET	1 OF 1