ROHS

http://www.okhro.com

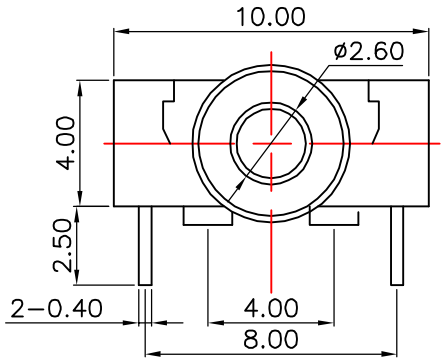

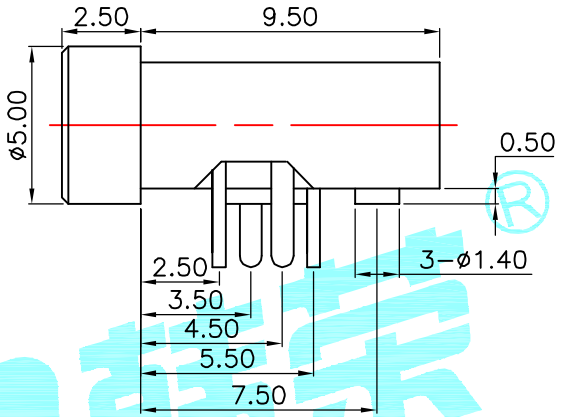

P.C.B Layout (copper–sided view)

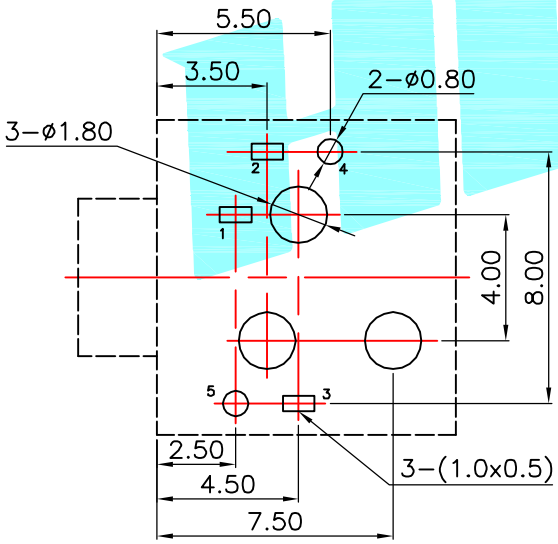

Model NO	PJ–2040–A PJ–2040B–A	PJ–2040–B PJ–2040B–B
Schematic		
Model NO	PJ–2040–C PJ–2040B–C	PJ–2040–D PJ–2040B–D
Schematic		

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:–20℃~70℃
Operating force:3–20N
Operating Life:5,000cycles

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
②	Terminal	——	5	Phosphor bronze	Au Plating	——
①	Housing	——	1	Nylon	Black	——

APPROVALS		DATE	HRO韩宏® ELECTRONICS CO.,LTD	
DRAWN	J.X.Zhang	2013/11/11		
CHECKED			TITLE:	PHONE JACKES
APPROVALS			PART NO.	PJ–2040
TOLERANCES ARE	30~以上 ±0.30 10~30 ±0.20 5~10 ±0.15 ~ 5 ±0.10	ANGLE ±2°	UNIT: mm	SCALE: 1:1 PROJ:
			DRAWING NO.	—— SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——