
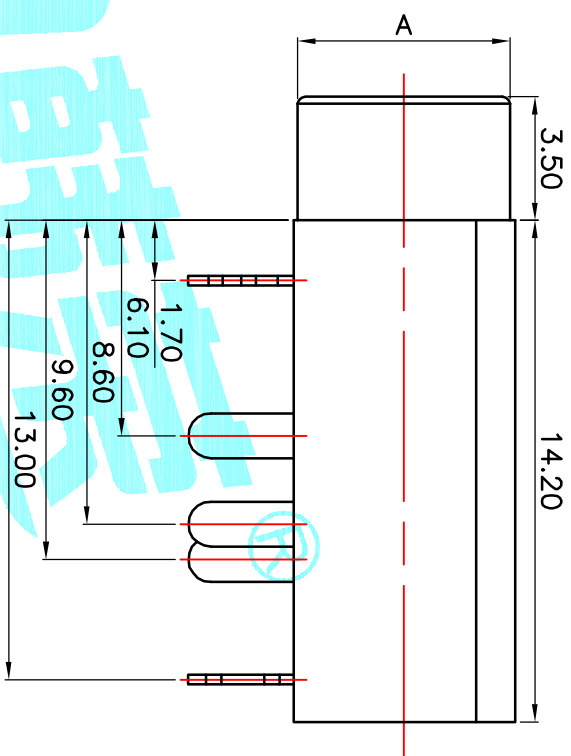


P.C.B LAYOUT(copper-sided view)
13.00

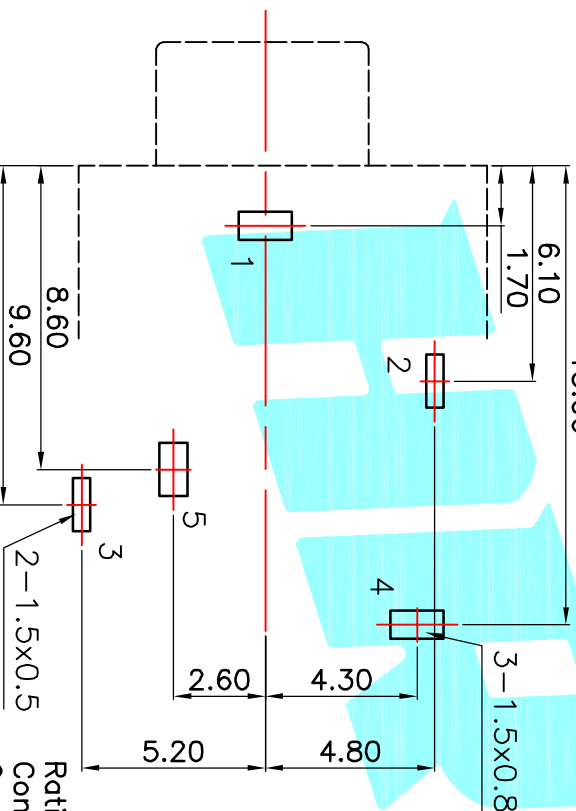

Model No.	A=φ6	PJ-3240-A	PJ-3240-B	PJ-3240-C
Schematic	A=M6xP0.5	PJ-3240M-A	PJ-3240M-B	PJ-3240M-C

Model No.	A=φ6	PJ-3240-D	PJ-3240-E
Schematic	A=M6xP0.5	PJ-3240M-D	PJ-3240M-E

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

② Terminal	5	Phosphor bronze	Au Plating
① Housing	1	Nylon	Black
ITEM	PART NAME	TERN.O.	QTY.
APPROVALS		DATE	
DRAWN	J.X.Zhang	2013/11/11	
CHECKED		TITLE:	PHONE JACKES
APPROVALS		PART NO.	PJ-3240
TOLERANCES ARE		SCALE:	1:1
30 [±] 以上	±0.30	ANGLE	
10~30	±0.20	UNIT:	mm
5~10	±0.15	DRAWING NO.	
~5	±0.10	SHEET	1 OF 1



ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			