


P.C.B LAYOUT(copper-sided view)

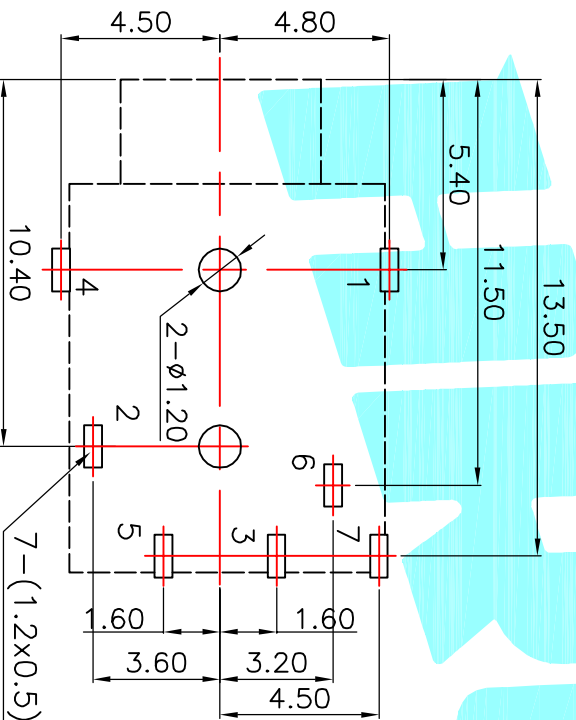

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature: -20℃~70℃  
 Operating force:3-20N  
 Operating Life:5,000cycles

②	Terminal	7	Phosphor bronze	Au Plating		
①	Housing	1	Nylon	Black		
ITEM	PART NAME	TERN.O.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				

DRAWN J.X.Zhang 2013/11/11

TITLE: PHONE JACKES

CHECKED

PART NO. PJ-3620

APPROVALS

TOLERANCES ARE

30 <sup>±0.15</sup>	±0.30	ANGLE
10 <sup>±0.30</sup>	±0.20	UNIT: mm
5 <sup>±0.10</sup>	±0.15	SCALE: 1:1
~5	±0.10	±Z

DRAWING NO.

PROJ. SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			



ELECTRONICS CO.,LTD