


P.C.B LAYOUT(copper-sided view)

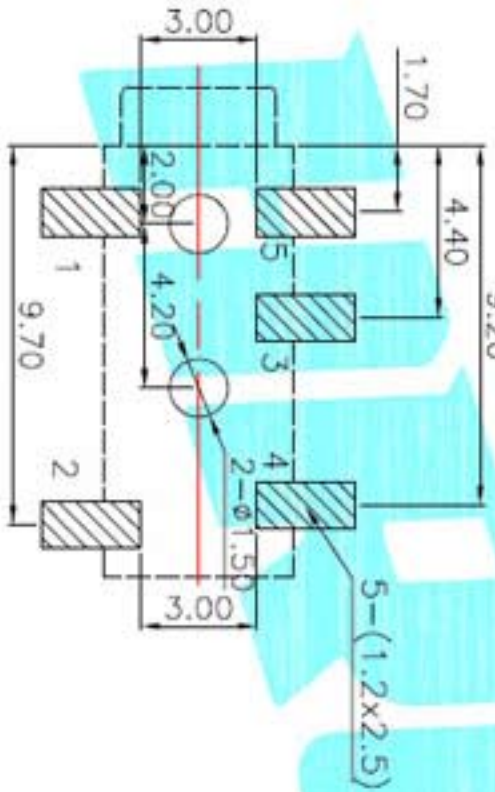

Rating:0.5A 30V DC
 Contact Resistance:100 m Ω Max.
 Operating temperature:-20 $^{\circ}$ C~70 $^{\circ}$ C
 Operating force:3-20N
 Operating Life:5,000cycles

Model No.	PJ-233-A	PJ-233-B
Schematic		
Model No.	PJ-233-C	
Schematic		

② Terminal	5	Phosphor bronze	Au Plating
① Housing	1	Nylon	Black
ITEM	PART NAME	TERNO.	QTY.
APPROVALS		DATE	
DRAWN	J.X.Zhong	2013/11/11	
CHECKED			
APPROVALS			
TOLERANCES ARE		30 \pm 0.1	50.30
		10 \pm 0	50.30
		5 \pm 0	50.15
		\pm 0.10	
TITLE:		PHONE JACKS	
PART NO.		PJ-233	
UNIT: mm		SCALE: 1:1	
DRAWING NO.		PROJ. SHEET 1 OF 1	

OKHRO
 ELECTRONICS CO.,LTD

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			